

SHALL®



SHALL TOOLS CO.,LTD

Add: No. 9 Chunchao Road, Xiaoshan Economy & Technology Zone, Hangzhou Zhejiang China

Tel: 0086-571-82651930 82651931

Fax: 0086-571-82657190

E-mail: shall@shalltools.com

Website: www.shallgroup.com



SHALL®

Tools solution since 1998

PROFESSIONAL PNEUMATIC TOOLS

INDEX



ABOUT SHALL















SHALL is founded in 1998, located in Economy & Technology Development Area, total 25,000 square meter.

SHALL products include Tools, Automotive Accessories, Fasteners, Hardware and Pump. More than 10,000 items. Tools include Garden Tools, Power Tools, Power Tool Accessories, Hand Tools, Tool Sets and Pneumatic Tools. Automotive Accessories include Car Accessories, Trailer Accessories, Caravan Accessories

As a Reliable Chinese company, The SHALL Group offer customers quality products, competitive prices and on-time deliveries. We sell our products world wide.

SHALL have good reputation in the market. SHALL's Excellent Financial Situation strongly support our Input of Marketing, QA, New Products Developing...

SHALL is good. SHALL can be better. SHALL is Improving & Growing.

	Air Nailer	1-11
	Air Impact Wrench	12-24
	Pneumatic Screwdriver	25-28
	Air Drill	29-31
	Air Riveter Gun	32
	Air Sander	33-41
	Air Spray Gun	42-55
	Tire Inflating Gun	50
	Air Blowing Gun	52-53
	Air Die Grinder	56-62
	Pneumatic Scissors	63-64
	Air Hammer	65-66
	Air Compressors	67-70
	Air Tool Sets	71-73

AIR NAILER



Framing Nailer

SHALL®



No.5010001 Ga11-8, RHF9021



FEATURE:

- Die-casting body, Light weight and powerful.
- 360° adjustable exhaust cover deflector.
- Safe for operators with touch-strike safety system.
- Adjustable to control the nails depth.
- One piece drive blade for professional application.
- Rubber wrapper handle for more comfortable and control.
- No-mar tip protects work surface.

APPLICATION:



Ga11-Ga8, ϕ 2.87- ϕ 3.33mm



No.5010002 Ga11-8, CHF9034



FEATURE:

- Die-casting body, Light weight and powerful.
- 360° adjustable exhaust cover deflector.
- Safe for operators with touch-strike safety system.
- Adjustable to control the nails depth.
- One piece drive blade for professional application.
- Rubber wrapper handle for more comfortable and control.
- No-mar tip protects work surface.

APPLICATION:



Ga11-Ga8, ϕ 2.8- ϕ 3.8mm


No.5010003 CN45



FEATURE:

- Heat treated aluminum Housing.
- Comfortable over-molded rubber grip.
- Single-action side-load high-capacity magazine that holds up to 120 coil nails and reduces downtime.
- Dual carbide inserts for durability.

APPLICATION:



ϕ 2.5- ϕ 3.05mm

Item No.	Model	Dimension(mm) (WxHxL)	Weight (kgs)	Operation Pressure	Load Capacity
5010001	Ga11-Ga8, RHF9021	107x379x500	3.8	5.5-8 Bar 80-120 Psi	2x30 pcs
5010002	Ga11-Ga8, CHF9034	120x365x495	3.75	5-8 Bar 70-120 Psi	80 pcs
5010003	CN45	58x279x295	2.86	4.8-7.5 Bar 70-110 Psi	120 pcs


No.5010004 CN55



FEATURE:

- Heat treated aluminum Housing.
- Selective actuation switch for convenience.
- Extra fast at the rate of 3 nails per second.
- Powerful for tough engineered lumber and pallet.
- Tool-free precise adjustable depth of drive.
- Comfortable over-molded rubber grip.
- Comfortable body design for better balance and control.

APPLICATION:




No.5010005 CN70



FEATURE:

- Heat treated aluminum Housing.
- Selective actuation switch for convenience.
- Extra fast at the rate of 3 nails per second.
- Powerful for tough engineered lumber and pallet.
- Tool-free precise adjustable depth of drive.
- Comfortable over-molded rubber grip.
- Comfortable body design for better balance and control.

APPLICATION:




No.5010006 CN90



FEATURE:

- 360° adjustable exhaust cover deflector.
- "Contact mode" safety system-rapid Fire.
- "Sequential mode" can be available by changing trigger.
- Light diecasting body of magnesium alloy.
- Use 15° wire collated coil nails.
- Side loading system.
- Easy Length adjust design.
- Non-marring tip available.

APPLICATION:




No.5010007 Ga14, ST64



FEATURE:

- Can shoot the nails to concrete
- Light weight and larger piston for increased powerful
- Safe for operators with touch-strike safety system.
- Rubber wrapper handle for more comfortable and control.
- One piece drive blade for professional application.
- Easy open latch for more comfortable loading.

APPLICATION:




No.5010008 Ga16, T50



FEATURE:

- Light weight and larger piston for increased powerful.
- Safe for operators with touch-strike safety system.
- Rubber wrapper handle for more comfortable and control.
- One piece drive blade for professional application.
- Easy open latch for more comfortable loading.

APPLICATION:




No.5010009 Ga18, F50



FEATURE:

- 360° adjustable exhaust cover deflector design.
- Safe for operators with touch-strike safety system.
- Rubber wrapper handle for more comfortable and control.
- Light weight and larger piston for increased powerful.
- One piece drive blade for professional application.
- Quick release latch for jams.
- Combination trigger with lock.

APPLICATION:



Item No.	Model	Dimension(mm) (WxHxL)	Weight (kgs)	Operation Pressure	Load Capacity
5010004	CN55	283x131x270	2.75	5.8-8 Bar 85-115 Psi	300-350 pcs
5010005	CN70	315x128x306	3.0	5.8-8 Bar 85-115 Psi	225-300 pcs
5010006	CN90	376x145x375	3.9	5-7.5 Bar 75-110 Psi	300 pcs


Item No.	Model	Dimension(mm) (WxHxL)	Weight (kgs)	Operation Pressure	Load Capacity
5010007	Ga14, ST64	90x260x300	2.9	5-8 Bar 70-120 Psi	80 pcs
5010008	Ga16, T50	90x250x300	2.4	5-8 Bar 70-120 Psi	100 pcs
5010009	Ga18, F50	55x246x249	1.4	4.8-7.5 Bar 70-110 Psi	100 pcs

No.5010010 Ga18, F50



FEATURE:

- Safe for operators with touch-strike safety system.
- Rubber wrapper handle for more comfortable and control.
- Light weight and larger piston for increased powerful.
- One piece drive blade for professional application.
- Quick release latch for jams.
- Combination trigger with lock.



Ga18, 1.05x1.25mm

APPLICATION:




No.5010011 Ga18, F50



FEATURE:

- 360° adjustable exhaust cover deflector design.
- Safe for operators with touch-strike safety system.
- Rubber wrapper handle for more comfortable and control.
- Light weight and larger piston for increased powerful.
- One piece drive blade for professional application.
- Quick release latch for jams.
- Combination trigger with lock.



Ga18, 1.05x1.25mm

APPLICATION:




No.5010012 Ga18, F50



FEATURE:

- 360° adjustable exhaust cover deflector.
- Safe for operators with touch-strike safety system.
- Traditional quick release design.
- Light die cast body of aluminum alloy.
- Side loading design.
- Depth control system.



Ga18, 1.05x1.25mm

APPLICATION:




No.5010013 Ga18, F30



FEATURE:

- Safe for operators with touch-strike safety system.
- Rubber wrapper handle for more comfortable and control.
- Hardened special steel balde for long life.
- Easy open latch for more comfortable loading.



Ga18, 1.05x1.25mm

APPLICATION:




No.5010014 Ga18, F30



FEATURE:

- 360° adjustable exhaust cover deflector design.
- Safe for operators with touch-strike safety system.
- Rubber wrapper handle for more comfortable and control.
- Hardened special steel balde for long life.
- Easy open latch for more comfortable loading.



Ga18, 1.05x1.25mm

APPLICATION:




No.5010015 Ga18, SF5040



FEATURE:

- Designed with 2 in 1 magazine applicable for both brads and staples.
- One piece drive blade for professional application.
- Quick release latch for fast loading.
- Oxidation alum magazine, strong and light.
- Special side view window for quick fastener review without opening magazine.
- 360° adjustable exhaust cover deflector.
- Safe for operators with touch-strike safety system.
- Light weight and larger piston for increased powerful.
- Combination trigger with lock.



Ga18, 1.05x1.25mm Ga18, 1.05x1.25mm

APPLICATION:



Item No.	Model	Dimension(mm) (WxHxL)	Weight (kgs)	Operation Pressure	Load Capacity
5010010	Ga18, F50	60x220x255	1.35	4-7 Bar 60-110 Psi	100 pcs
5010011	Ga18, F50	60x230x255	1.35	4-7 Bar 60-110 Psi	100 pcs
5010012	Ga18, F50	63x255x263	1.5	5-7 Bar 75-100 Psi	100 pcs

Item No.	Model	Dimension(mm) (WxHxL)	Weight (kgs)	Operation Pressure	Load Capacity
5010013	Ga18, F30	55x185x240	1.1	4-7 Bar 60-110 Psi	100 pcs
5010014	Ga18, F30	55x180x250	1.25	4-7 Bar 60-100 Psi	100 pcs
5010015	Ga18, SF5040	60x235x255	1.45	4-7 Bar 60-110 Psi	100 pcs


No.5010016 Ga18, F50/9040



FEATURE:

- "Contact mode" safety system
- Light die cast body of aluminum alloy
- 360° adjustable exhaust cover deflector.
- Remain nail display available
- Non-marring tip available

APPLICATION:




No.5010019 Ga18, SF3232



FEATURE:

- Heat treated aluminum Housing.
- Selective actuation switch for convenience.
- Tool-free precise adjustable depth of drive.
- Comfortable over-molded rubber grip.
- Comfortable body design for better balance and control.
- 360° adjustable exhaust cover deflector.
- Tool-free Jam Release.

APPLICATION:




No.5010017 Ga18, F50/9040



FEATURE:

- "Contact mode" safety system
- Light die cast body of aluminum alloy
- 360° adjustable exhaust cover deflector.
- Remain nail display available
- Non-marring tip available
- Quick release function

APPLICATION:




No.5010020 Ga16, N851



FEATURE:

- One piece drive blade for professional application.
- Die-casting body, strong and light weight.
- New designed quick strain release latch for easy & fast loading of the nails.
- Oxidation Alum magazine, strong and light long life.
- Large piston for increased power.
- Safe for operators with touch-strike safety system.

APPLICATION:

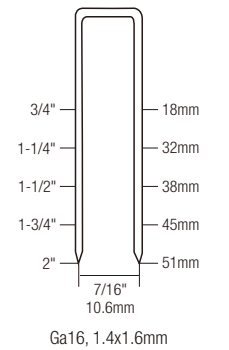


No.5010018 Ga18, SF3232



FEATURE:

- Hardened special steel blade for long life.
- Designed with 2 in 1 magazine applicable for both brads and staples.
- Oxidation alum magazine, strong and light.
- 360° adjustable exhaust cover deflector design.
- Safe for operators with touch-strike safety system.
- Light weight and larger piston for increased powerful.
- Combination trigger with lock.

APPLICATION:




No.5010021 Ga20, J1013



FEATURE:

- Strong and light weight Die-casting Alum body.
- Lorn magazine with harden treatment for long life and smooth.
- Economical air consumption and low noise.
- Handened stainless steel driver for long life.

APPLICATION:



Item No.	Model	Dimension(mm) (WxHxL)	Weight (kgs)	Operation Pressure	Load Capacity
5010016	Ga18, F50/9040	55x240x250	1.46	5-7 Bar 75-100 Psi	100 pcs
5010017	Ga18, F50/9040	63x245x255	1.53	5-7 Bar 75-100 Psi	100 pcs
5010018	Ga18, SF3232	55x200x235	1.25	4-7 Bar 60-110 Psi	100 pcs

Item No.	Model	Dimension(mm) (WxHxL)	Weight (kgs)	Operation Pressure	Load Capacity
5010019	Ga18, SF3232	55x215x245	1.27	5-7 Bar 70-100 Psi	100 pcs
5010020	Ga16, N851	95x290x350	2.75	4-7 Bar 60-110 Psi	80 pcs
5010021	Ga20, J1013	50x160x220	0.90	4-7 Bar 60-110 Psi	100 pcs


No.5010022 Ga20, T50



FEATURE:

- Die-casting gun body, light weight and powerful.
- Rubber wrapper handle for more comfortable and control.
- One piece drive blade for professional application.
- Iron magazine with harden treatment for long life and smooth.

APPLICATION:




No.5010025 Ga20, J422



FEATURE:

- Die-casting gun body, light weight and powerful.
- Rubber wrapper handle for more comfortable and control.
- One piece drive blade for professional application.
- Iron magazine with harden treatment for long life and smooth.

APPLICATION:




No.5010023 Ga20, J1022



FEATURE:

- Die-casting gun body, light weight and powerful.
- Rubber wrapper handle for more comfortable and control.
- One piece drive blade for professional application.
- Iron magazine with harden treatment for long life and smooth.

APPLICATION:




No.5010026 Ga21, FS8016



FEATURE:

- One piece drive blade for professional application.
- Die-casting gun body, light weight and powerful.
- Rubber wrapper handle for more comfortable and control.
- Easy open latch for more comfortable loading.

APPLICATION:




No.5010024 Ga20, J1022



FEATURE:

- 360° adjustable exhaust cover deflector.
- Die-casting gun body, light weight and powerful.
- Rubber wrapper handle for more comfortable and control.
- One piece drive blade for professional application.
- Iron magazine with harden treatment for long life and smooth.

APPLICATION:




No.5010027 Ga22, FS7116



FEATURE:

- One piece drive blade for professional application.
- Die-casting gun body, light weight and powerful.
- Rubber wrapper handle for more comfortable and control.
- Easy open latch for more comfortable loading.

APPLICATION:



Item No.	Model	Dimension(mm) (WxHxL)	Weight (kgs)	Operation Pressure	Load Capacity
5010022	Ga20, T50	45x146x221	0.95	4-7 Bar 60-100 Psi	100 pcs
5010023	Ga20, J1022	55x175x240	1.2	4-7 Bar 60-110 Psi	100 pcs
5010024	Ga20, J1022	54x186x241	1.25	4.8-7.5 Bar 70-110 Psi	100 pcs

Item No.	Model	Dimension(mm) (WxHxL)	Weight (kgs)	Operation Pressure	Load Capacity
5010025	Ga20, J422	55x175x230	1.2	4-7 Bar 60-110 Psi	100 pcs
5010026	Ga21, FS8016	47x147x205	0.90	4-7 Bar 60-110 Psi	140 pcs
5010027	Ga22, FS7116	47x147x205	0.90	4-7 Bar 60-110 Psi	150 pcs


No.5010028 Ga23, MP625



FEATURE:

- Hardened oxidaton Alum magazine, strong and light.
- Use the cirumgyrate switch adjust pin long.
- Hardened stainless steel driver for long life.
- Die-casting gun body, light weight and powerful.
- Rubber wrapper handle for more comfortable and control.

APPLICATION:




No.5010029 Ga23, H625



FEATURE:

- Heat treated aluminum Housing.
- Heat treated one piece steel driver blade.
- Light weight for better long time and overhead pinning jobs.
- Narrow nose for accurate nail placement and tight spaces.
- Anodized cylinder and magazine.
- Fastener indicator for reloading.
- Rear exhaust with embedded muffle.
- Removable No-mar tip.
- Safer double trigger.

APPLICATION:




No.5010030 Ga23, P635



FEATURE:

- Hardened oxidaton Alum magazine, strong and light.
- Use the cirumgyrate switch adjust pin long.
- Hardened stainless steel driver for long life.
- Die-casting gun body, light weight and powerful.
- Rubber wrapper handle for more comfortable and control.
- Easy side loading magazine without any adjustment.

APPLICATION:



Item No.	Model	Dimension(mm) (WxHxL)	Weight (kgs)	Operation Pressure	Load Capacity
5010028	Ga23, MP625	45x160x225	1.00	3.5-7 Bar 50-110 Psi	100 pcs
5010029	Ga23, H625	45x162x215	1.25	4-7 Bar 60-100 Psi	100 pcs
5010030	Ga23, P635	45x180x220	1.05	3.5-7 Bar 50-110 Psi	100 pcs

AIR IMPACT WRENCH

